



Website



Facebook



YouTube

— **simon** —
LIGHT UP
EMOTIONS

simon

SIMON, S.A.
Tel. +34 902 109100
Web. www.simonelectric.com

Simon Electric (Vietnam)
Tel. +84 96 8111900
Web. www.simon.vn

Simon Electric (China)
Tel. +86 21 3855 5222
Web. www.simon.com.cn

PT Simon Elektrik Indonesia
Tel. +62 21 52960373
Web. www.simonelektrik.co.id

Simon Electric (APAC)
Web. www.simon-apac.com
E-mail. info@simon-apac.com

July 2021 Printed

ALTA | HS68




Reshape the Light and Shadow

simon
LIGHT UP EMOTIONS




The development concept of HS68 is based on the platform of modularization and easy-plug. Through the common module, HS68 range can be extended to a variety of items with different accessories, such as recessed, track-mounted, pendant, wall-mounted, etc. They are suitable for different commercial space and home space, which offer a high degree of flexible.



Plug & Play connector, magnetic interface with safety lock

Driver can be changed easily, and it enable user to change the lamp type according to the space freely.

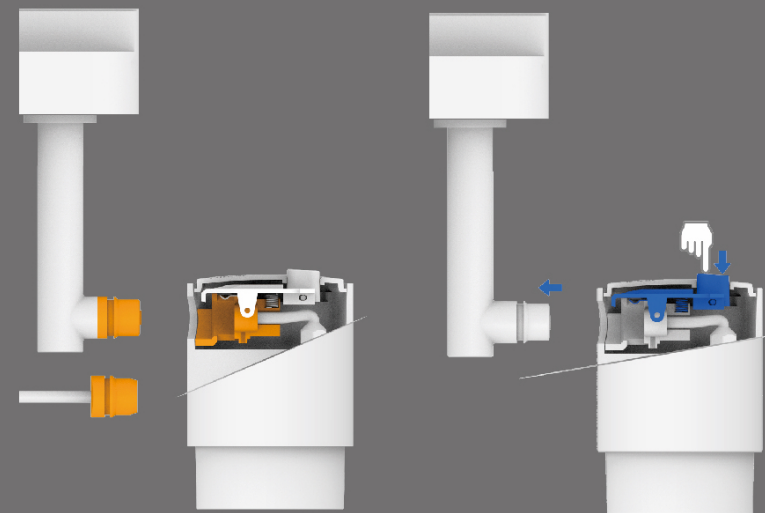


Magnetic plug & play power connector



Easy in & out safety lock


Modular power supply design

Intelligent control mode can be switched according to the user requirements.

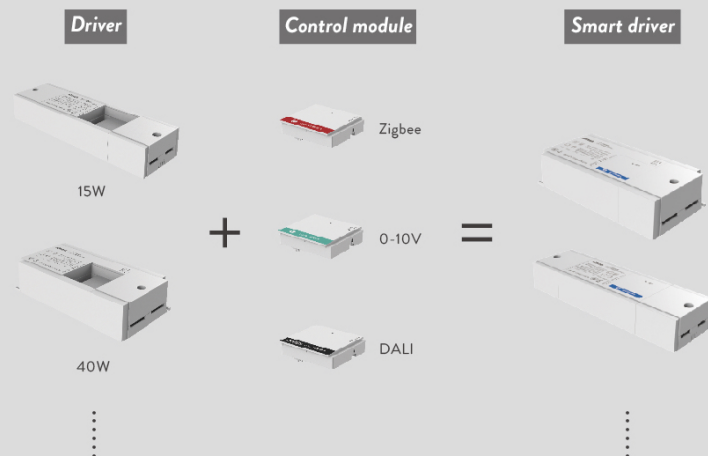

Innovative buckle design


Easy and fast maintenance.

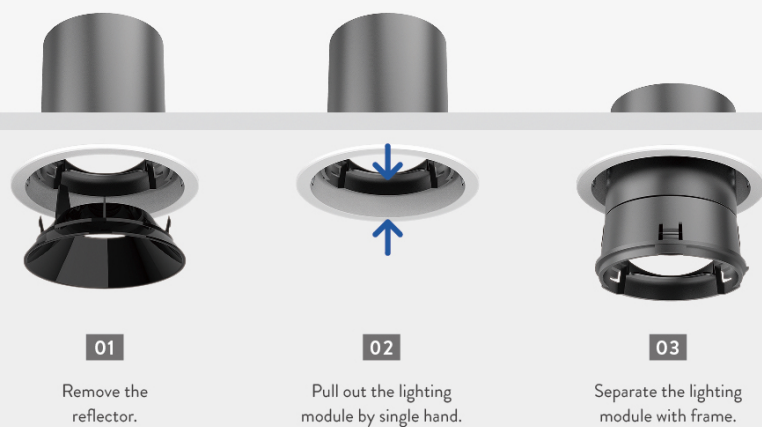

Five big innovations, more breakthrough

Double-lens optic technology

Single light path, no stratification.
Full control of light, more accurate result.

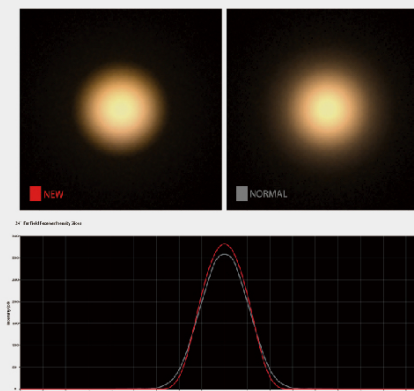


Liquid metal conduction material


Strong heat exchange design, 10 times higher thermal conductivity (30W/m.k).

Excellent heat dissipation capacity, longer product lifespan.

ALTA | HS68

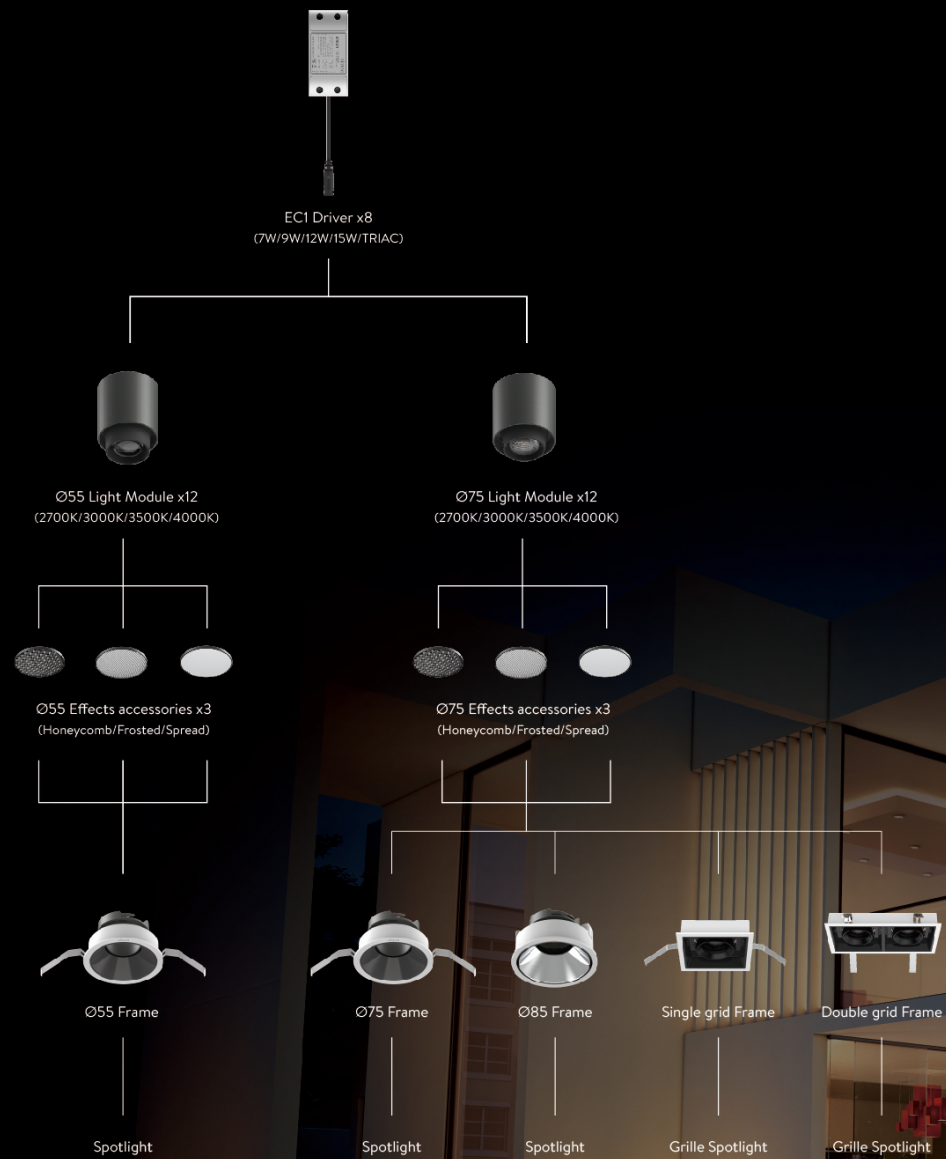

ALTA | HS68S

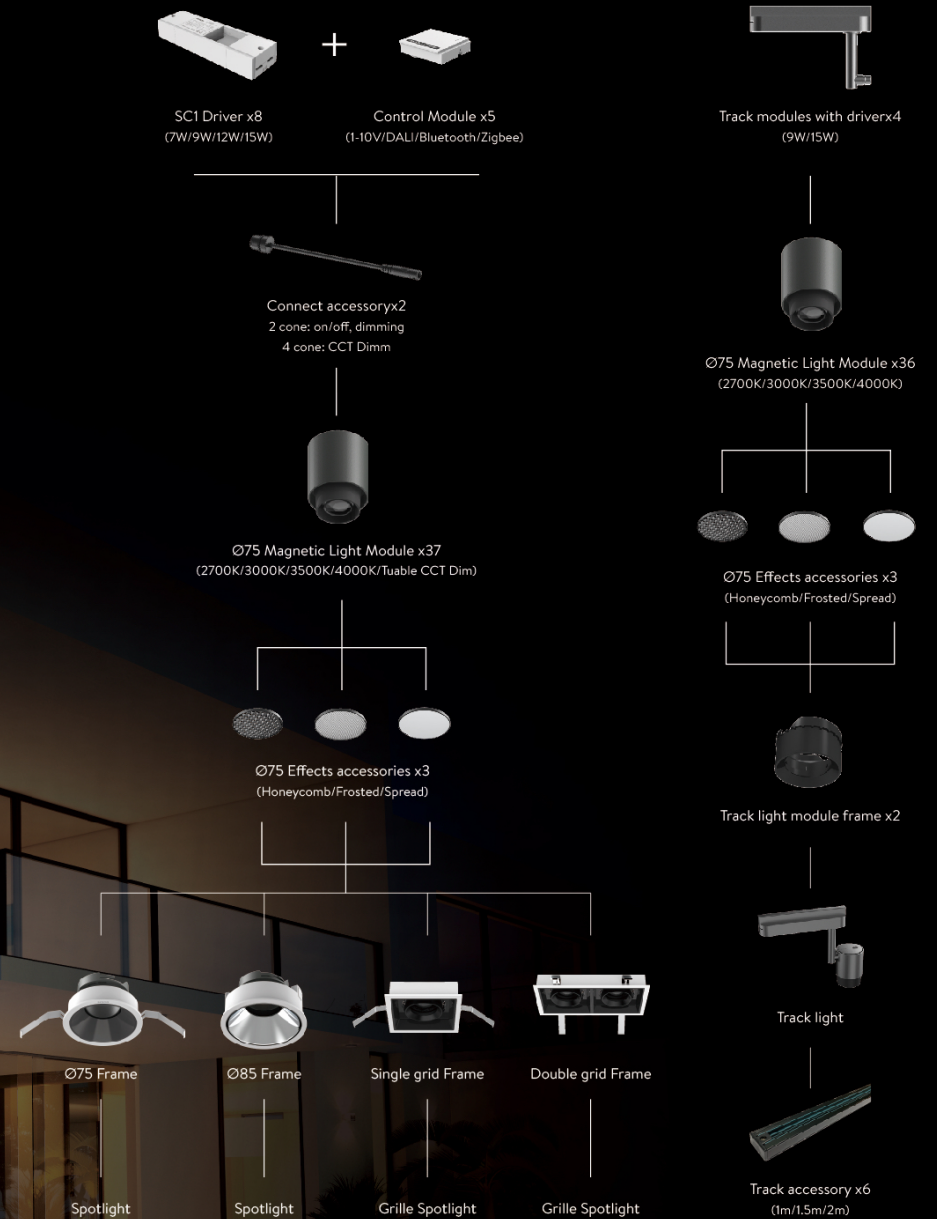

HS68

Ø55 Light modules



N0424-2451	Alta LED-HS68 module GY 7W2700K15° Ø55
N0424-2452	Alta LED-HS68 module GY 7W3000K15° Ø55
N0424-2455	Alta LED-HS68 module GY 7W3500K15° Ø55
N0424-2453	Alta LED-HS68 module GY 7W4000K15° Ø55

N0424-1731	Alta LED-HS68 module GY 7/9W2700K24° Ø55
N0424-1732	Alta LED-HS68 module GY 7/9W3000K24° Ø55
N0424-2456	Alta LED-HS68 module GY 7/9W3500K24° Ø55
N0424-1733	Alta LED-HS68 module GY 7/9W4000K24° Ø55

N0424-1734	Alta LED-HS68 module GY 7/9W2700K36° Ø55
N0424-1735	Alta LED-HS68 module GY 7/9W3000K36° Ø55
N0424-2457	Alta LED-HS68 module GY 7/9W3500K36° Ø55
N0424-1736	Alta LED-HS68 module GY 7/9W4000K36° Ø55

EC1 Drivers



N6524-0336	LED EC1 driver 7W160mA36VDC
N6524-0337	LED EC1 driver 9W200mA36VDC
N6524-0338	LED EC1 driver 12W300mA36VDC
N6524-0339	LED EC1 driver 15W360mA36VDC

N6524-0346	LED EC1 driver 7W160mA36VDC (TRIAC)
N6524-0347	LED EC1 driver 9W200mA36VDC (TRIAC)
N6524-0348	LED EC1 driver 12W300mA36VDC (TRIAC)
N6524-0349	LED EC1 driver 15W360mA36VDC (TRIAC)

HS68S

Ø75 Magnetic light modules



N0424-1749	Alta LED-HS68S magnetic module GY 7/9/12/15W2700K15° Ø75
N0424-1750	Alta LED-HS68S magnetic module GY 7/9/12/15W3000K15° Ø75
N0424-2461	Alta LED-HS68S magnetic module GY 7/9/12/15W3500K15° Ø75
N0424-1751	Alta LED-HS68S magnetic module GY 7/9/12/15W4000K15° Ø75

N0424-1752	Alta LED-HS68S magnetic module GY 7/9/12/15W2700K24° Ø75
N0424-1753	Alta LED-HS68S magnetic module GY 7/9/12/15W3000K24° Ø75
N0424-2462	Alta LED-HS68S magnetic module GY 7/9/12/15W3500K24° Ø75
N0424-1754	Alta LED-HS68S magnetic module GY 7/9/12/15W4000K24° Ø75

N0424-1755	Alta LED-HS68S magnetic module GY 7/9/12/15W2700K36° Ø75
N0424-1756	Alta LED-HS68S magnetic module GY 7/9/12/15W3000K36° Ø75
N0424-2463	Alta LED-HS68S magnetic module GY 7/9/12/15W3500K36° Ø75
N0424-1757	Alta LED-HS68S magnetic module GY 7/9/12/15W4000K36° Ø75

N0424-1758	Alta LED-HS68S magnetic module WH 7/9/12/15W2700K15° Ø75
N0424-1759	Alta LED-HS68S magnetic module WH 7/9/12/15W3000K15° Ø75
N0424-2464	Alta LED-HS68S magnetic module WH 7/9/12/15W3500K15° Ø75
N0424-1760	Alta LED-HS68S magnetic module WH 7/9/12/15W4000K15° Ø75

N0424-1761	Alta LED-HS68S magnetic module WH 7/9/12/15W2700K24° Ø75
N0424-1762	Alta LED-HS68S magnetic module WH 7/9/12/15W3000K24° Ø75
N0424-2465	Alta LED-HS68S magnetic module WH 7/9/12/15W3500K24° Ø75
N0424-1763	Alta LED-HS68S magnetic module WH 7/9/12/15W4000K24° Ø75

Ø75 Light modules

N0424-1737	Alta LED-HS68 module GY 7/9/12/15W2700K15° Ø75
N0424-1738	Alta LED-HS68 module GY 7/9/12/15W3000K15° Ø75
N0424-2458	Alta LED-HS68 module GY 7/9/12/15W3500K15° Ø75
N0424-1739	Alta LED-HS68 module GY 7/9/12/15W4000K15° Ø75

N0424-1743	Alta LED-HS68 module GY 7/9/12/15W2700K24° Ø75
N0424-1744	Alta LED-HS68 module GY 7/9/12/15W3000K24° Ø75
N0424-2459	Alta LED-HS68 module GY 7/9/12/15W3500K24° Ø75
N0424-1745	Alta LED-HS68 module GY 7/9/12/15W4000K24° Ø75

N0424-1746	Alta LED-HS68 module GY 7/9/12/15W2700K36° Ø75
N0424-1747	Alta LED-HS68 module GY 7/9/12/15W3000K36° Ø75
N0424-2460	Alta LED-HS68 module GY 7/9/12/15W3500K36° Ø75
N0424-1748	Alta LED-HS68 module GY 7/9/12/15W4000K36° Ø75

Installation	Optics Accessory	Effects accessories	IP
Recessed	Black/Silver reflector	Honeycomb/Frosted/Spread	IP20

Parameter

Power: 7/9/12/15W	CRI: >90
CCT: 2700K/3000K/3500K/4000K	Voltage: 220-240V
LED luminous: 820/1060/1410/1650lm	Finishes: GY-Grey
Luminaire light output: 480/700/950/1000lm	
Lifespan: 50000h	

N0424-1764	Alta LED-HS68S magnetic module WH 7/9/12/15W2700K36° Ø75
N0424-1765	Alta LED-HS68S magnetic module WH 7/9/12/15W3000K36° Ø75
N0424-2466	Alta LED-HS68S magnetic module WH 7/9/12/15W3500K36° Ø75
N0424-1766	Alta LED-HS68S magnetic module WH 7/9/12/15W4000K36° Ø75

N0424-1767	Alta LED-HS68S magnetic module BK 7/9/12/15W2700K15° Ø75
N0424-1768	Alta LED-HS68S magnetic module BK 7/9/12/15W3000K15° Ø75
N0424-2467	Alta LED-HS68S magnetic module BK 7/9/12/15W3500K15° Ø75
N0424-1769	Alta LED-HS68S magnetic module BK 7/9/12/15W4000K15° Ø75

N0424-1770	Alta LED-HS68S magnetic module BK 7/9/12/15W2700K24° Ø75
N0424-1771	Alta LED-HS68S magnetic module BK 7/9/12/15W3000K24° Ø75
N0424-2468	Alta LED-HS68S magnetic module BK 7/9/12/15W3500K24° Ø75
N0424-1772	Alta LED-HS68S magnetic module BK 7/9/12/15W4000K24° Ø75

N0424-1773	Alta LED-HS68S magnetic module BK 7/9/12/15W2700K36° Ø75
N0424-1774	Alta LED-HS68S magnetic module BK 7/9/12/15W3000K36° Ø75
N0424-2469	Alta LED-HS68S magnetic module BK 7/9/12/15W3500K36° Ø75
N0424-1775	Alta LED-HS68S magnetic module BK 7/9/12/15W4000K36° Ø75

N0424-2470	Alta LED-HS68S magnetic module GY 7/9/12/15W2700-6000K24° Ø75
------------	---

****For recessed spotlight magnetic version only.**

HS68S

SC1 Drivers



N6524-0385	LED SC1 driver 7W160mA36VDC dim
N6524-0386	LED SC1 driver 9W200mA36VDC dim
N6524-0387	LED SC1 driver 12W300mA36VDC dim
N6524-0388	LED SC1 driver 15W360mA36VDC dim

N6524-0392	LED SC1 driver 7W160mA36VDC dim+turnable CCT
N6524-0393	LED SC1 driver 9W200mA36VDC dim+turnable CCT
N6524-0394	LED SC1 driver 12W300mA36VDC dim+turnable CCT
N6524-0395	LED SC1 driver 15W360mA36VDC dim+turnable CCT

Track modules with driver



N0424-2445	Alta LED-RS68S magnetic track module WH 9W
N0424-2446	Alta LED-RS68S magnetic track module WH 15W
N0424-2447	Alta LED-RS68S magnetic track module BK 9W
N0424-2448	Alta LED-RS68S magnetic track module BK 15W

Installation: According to the frame

Optics Accessory: Black/Silver reflector

Effects accessories: Honeycomb/Frosted/Spread

IP: IP20
IP44 (customized)

Parameter:

Power: 7/9/12/15W	LED luminous: 820/1060/1410/1650lm
Luminaire light output: 480/700/950/1000lm	CCT: 2700K/3000K/3500K/4000K
Finishes: GY - Grey WH - White BK - Black	Lifespan: 50000h

Voltage: 220-240V

CRI: >90

Sharing accessories

Effects accessories



N0424-1854	Honeycomb anti-glare louver Ø55
N0424-1855	Spread louver Ø55
N0424-1856	Frosted louver Ø55

N0424-1857	Honeycomb anti-glare louver Ø75
N0424-1858	Spread louver Ø75
N0424-1859	Frosted louver Ø75

Frames

N0424-1785	Silver round frame Ø55
N0424-1786	Black round frame Ø55

N0424-1787	Silver round frame Ø75
N0424-1788	Black round frame Ø75

N0424-1789	Silver round frame Ø85
N0424-1790	Black round frame Ø85

N0424-3039	Silver single grid frame Ø95*95
N0424-3040	Silver double grid frame Ø95*180
N0424-3041	Black single grid frame Ø95*95
N0424-3042	Black double grid frame Ø95*180

N0424-2449	Black track light module frame
N0424-2450	White track light module frame



Control modules


N6524-0354	1-10V dimming module for SC1 driver
N6524-0355	DALI dimming module for SC1 driver
N6524-0356	Bluetooth dimming module for SC1 driver
N6524-0412	Zigbee module for SC1 driver (dim+tunable CCT)
N6524-0413	Zigbee module for SC1 driver dim

Connect accessories



N0424-2444	Magnetic connect accessory (2 core)
N0424-2454	Magnetic connect accessory (4 core)

Track accessories



N6424-0057	3 Wires (L-N-E) Track-1 meter-WH
N6424-0058	3 Wires (L-N-E) Track-1.5 meters-WH
N6424-0059	3 Wires (L-N-E) Track-2 meters-WH
N6600-0611	3 Wires (L-N-E) Track-1 meter-BK
N6600-0612	3 Wires (L-N-E) Track-1.5 meters-BK
N6600-0613	3 Wires (L-N-E) Track-2 meters-BK

